


# MicroPoint 800

DATA SHEET  
**R.F. Capacitance  
Point Level Switch**

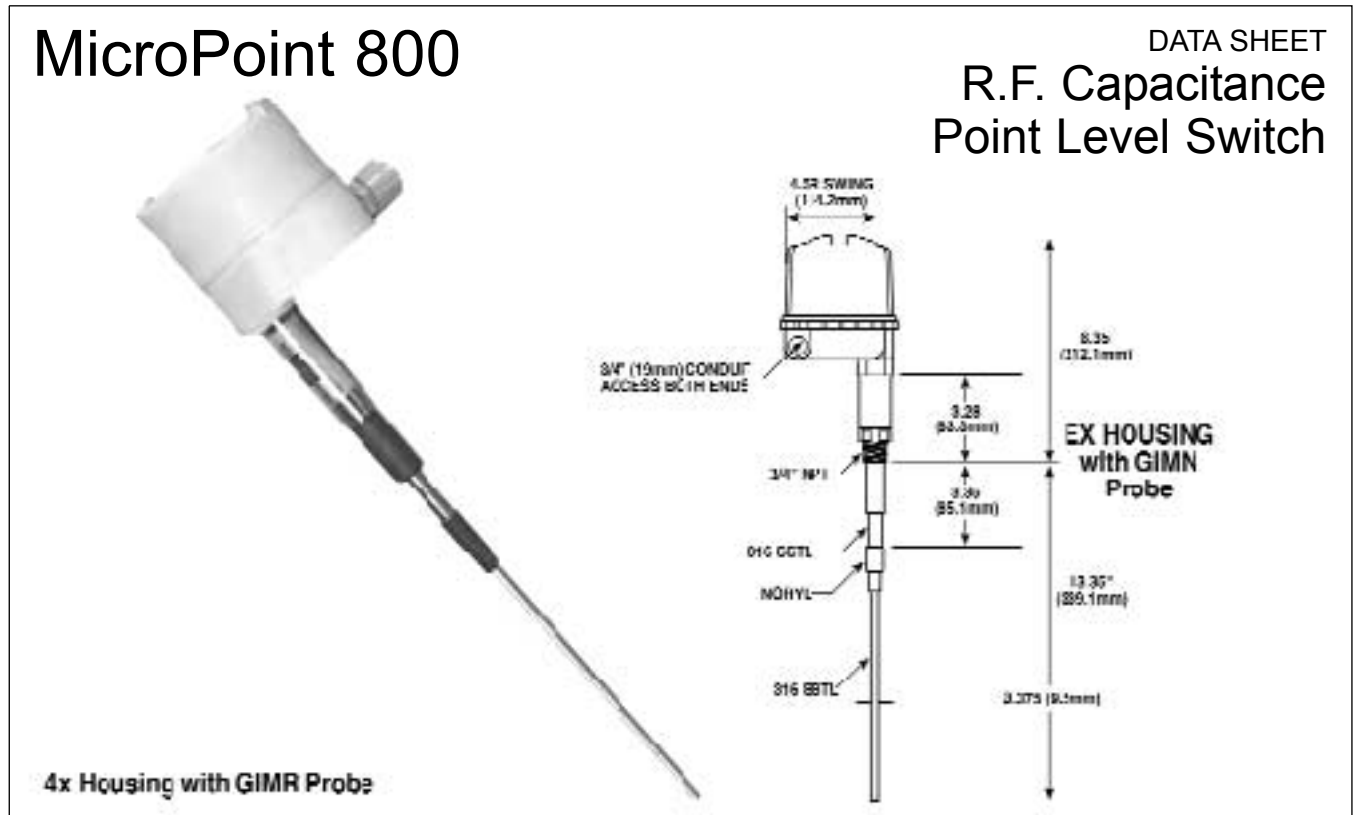

■ **PURPOSE**

Delavan's MicroPoint 800 is a truly cost effective Microprocessor Based R.F. Capacitance On/Off Switch used in powder bulk solid and liquid applications.

■ **OEM FRIENDLY DESIGN**

Designed with OEM customers in mind, the MicroPoint 800 features several user selectable options including: system output, supply voltage, enclosure type, and a wide range of sensing probes.

■ **PRINCIPLE OF OPERATION**

The MicroPoint 800 Microprocessor Based Point Level Switch consists of solid state electronics mounted in an explosion proof or corrosion resistant enclosure. The rugged sensing element utilizes a driven guard designed to eliminate the effects of material build-up or coatings.

The sensing element's "active" section is energized with a R.F. (radio frequency) signal approximately 2 MHz. When the process level changes, a change in capacitance occurs resulting in a change in frequency. This change is compared to a preset value and after amplification the signal is used to actuate a relay.

■ **FEATURES**

- On-board microprocessor
- Push button calibration
- Built-in driven guard  
Designed to eliminate false signals due to material build-up or coatings
- Sensitivity to .5 pF
- Integral electronics
- Explosion proof or corrosion resistant housing
- Adjustable time delay
- Non-volatile memory
- Field selectable fail-safe
- Sensing probes to 50 ft.
- Status indication LED's




## ■ SPECIFICATIONS

Supply Voltage	24 Volts DC Optional: 110/220 Volts AC
Absolute Limits	±4 Volts DC or 90-240 Volts AC
Power Consumption	□ 3 volt-amperes
Sensitivity	Factory set @ 5 pF Field adjustable: < 2 pF
Output	24 Volts DC = Solid state FET output 110/220 Volts AC = Form C DPDT Relay 5 amp @ 115 Volts AC Non-inductive 5 amp @ 230 Volts AC Non-inductive
Time Delay	Adjustable 50 milliseconds to 30 seconds
Fail-Safe Selectable	High Level or Low Level using jumper
Temperature Range	Electronics: -40°F to +160°F -40°C to +71°C
Enclosure Rating	Explosion Proof: Meets NEMA 4, 5, 7, 9, 12; NEC Class I, Division II; NEC Class II, Division II  Watertight: Meets NEMA 4X Watertight corrosion resistant

## ■ ORDERING INFORMATION

### MicroPoint

800-

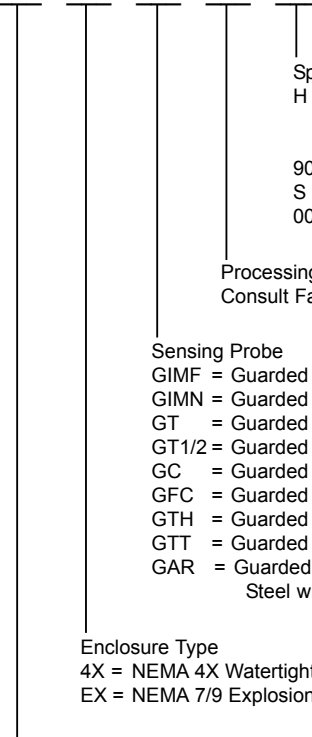

#### Special Features

- H = High Temperature Lagging Extension - only with GT Type Probes
- 90° = 90° Bend on Active Section
- S = Sensitivity Sleeve, 2" or 5"
- 00 = None

#### Processing Mounting Consult Factory

#### Sensing Probe

- GIMF = Guarded Injection Molded Fortron, 14"
- GIMN = Guarded Injection Molded Noryl, 14"
- GT = Guarded Teflon, 18"
- GT1/2 = Guarded Teflon, 1/2" Center Rod
- GC = Guarded Ceramic, 750°F Max
- GFC = Guarded Flexible Cable, 25 ft. Max
- GTH = Guarded Teflon, Hastelloy Wetted Parts
- GTT = Guarded Teflon, Teflon Sealed Active
- GAR = Guarded Abrasion Resistant Stainless Steel with Durable Plastic Insulator

#### Enclosure Type

- 4X = NEMA 4X Watertight Corrosion Resistant
- EX = NEMA 7/9 Explosion Proof

#### Output Options

- F = Solid State FET Output (24 Volts DC)
- R = Relay Output (110/220 Volts AC)

Micropoint 800 Capacitance Point Level Switch

**DEHAVAN** Process Instrumentation  
an [REDACTED] Company

Hillside, IL 60162  
Ph: (708) 236-6000  
Fax: (708) 236-6006  
Email: sales@ljtechnologies.com

